


Hunter®

Mini-Clik® Rain Sensors

Mini-Clik®

**The World's
Most Simple,
Accurate,
Rugged and
Reliable Rain
Sensors**

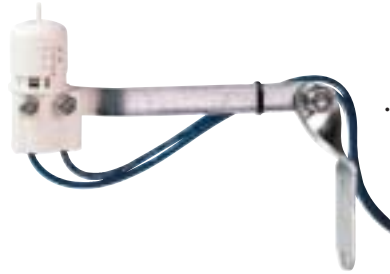

There's nothing more embarrassing – or more wasteful or costly – than an irrigation system that runs when it doesn't have to...in the rain. And the simplest, most effective way to prevent your sprinklers from coming on during or after precipitation is the Hunter Mini-Clik®. Easily installed on any automatic irrigation system, Mini-Clik shuts sprinklers off in a storm and keeps them off, automatically compensating for the amount of rainfall that occurred. Disks absorb water and then expand proportionally to the amount of rain that fell (e.g., a small cloudburst would result in little absorption, a thunderstorm with

5 cm of rain would lead to more absorption and thus more expansion). As the moisture-laden disks expand, they eventually activate a switch that interrupts the circuit from the controller to the solenoid valves. Once dry, they contract and release the switch. Thus, the Mini-Clik automatically resets without ever affecting your controller. Built to withstand the harshest conditions, there's no better way to ensure that your system isn't watering when it isn't necessary...no wonder the Mini-Clik name has been synonymous with rain sensors for more than two decades.

FEATURES & BENEFITS



Easily installs on any automatic irrigation system
Versatile enough to work with all popular controllers

Constructed of high impact thermoplastic and aluminum
Built sturdy for years of trouble-free operation

Adjusts to actuate at various rainfall quantities
Set from .3 cm to 2.5 cm based upon your local conditions

Includes 7.6 meters gauge two conductor wire
Fast and easy mounting out of sight

5-year warranty
Your guarantee of dependable operation




Sensor Guard: Vandal Resistance and Rain Sensor All-in-One

Combining the reliability of a Mini-Clik Rain Sensor with the security of a compact vandal resistant enclosure, the Sensor Guard is perfect for sports facilities, golf courses and municipal sites. Easy to install, the Sensor Guard includes a Mini-Clik conduit rain sensor plus stainless steel mounting bolts and a drill template. For peace of mind, you'll want to get your hands on the rain sensor that's designed to keep other's hands off. Model: SG-MC

Mini-Clik® Rain Sensors

All Mini-Clik rain sensors are UL Listed and available in three different models to accommodate your particular wiring needs.

MINI-CLIK



The standard Mini-Clik model, for use in most applications. Constructed of high impact thermoplastic and aluminum. Simple klik-stop settings accurately measure rainfall in quantities of .3 cm to 2.5 cm. Reset rate is adjustable.

Model: MINI-CLIK

MINI-CLIK-C



Features a 1/2" female threaded inlet at the bottom to accommodate any type of conduit to enclose wire. Electrical PVC or plumbing PVC pipe can be used with this unit since it is intended for 24 volt applications.

Model: MINI-CLIK-C

MINI-CLIK-HV



Adds in code approved liquid-tight electrical fittings for 120 or 240 volt wiring applications. Also includes 46 cm of #16 AWG installation wire. Integral bracket with supplied electrical fittings and conduit. Ready to mount on any standard junction box.

Model: MINI-CLIK-HV

Specifications

- Height: 12.7 cm
- Length: MINI-CLIK: 15.2 cm
MINI-CLIK-HV: 19 cm
- Electrical Rating: 24 VAC 2.6 amps
- Wiring: MINI-CLIK and MINI-CLIK-C: Typically interrupts the common ground wire between the solenoid valves and the controller.
MINI-CLIK-HV: For use with high voltage irrigation systems, and systems using pumps drawing less than 10 amps peak.
- Included with Unit: #20 AWG two conductor wire, 7.6 meters on standard model (24 cm on INT model) and a short lead wire for "normally open" wiring.
Also includes two mounting screws, controller identification label and detailed instructions.

Bypass Switch Box: Give Any Automatic Controller's Remote Sensors the Capability to Bypass

It's the easy way to put a system in the manual mode as would be needed during servicing and troubleshooting operations. Featuring a compact, heavy-duty switch mechanism, the Bypass Switch Box mounts quickly and easily with its no-strip wire connectors and supplied adhesive tape.



PRODUCT EXPLANATION

EXAMPLE: **MINI-CLIK-HV**

MODEL

MINI-CLIK

OPTIONS

- HV = High voltage model for 110/220 VAC applications
- C = Conduit mount
- INT = Includes 24 cm of #20 AWG two conductor wire to reduce freight weight

Note: For Mini-Clik in Sensor Guard Enclosure, specify SG-MC. To add bypass switch box to any installation, specify BPSW with sensor.

Available from:

